


# E13A Medium Duty

E13A for up to 5 electrodes, (8mmØ) max recommended length 3m

Type 81 mounting bracket

Type 214 electrode spacer

Type 218 Steady bracket complete with insulator

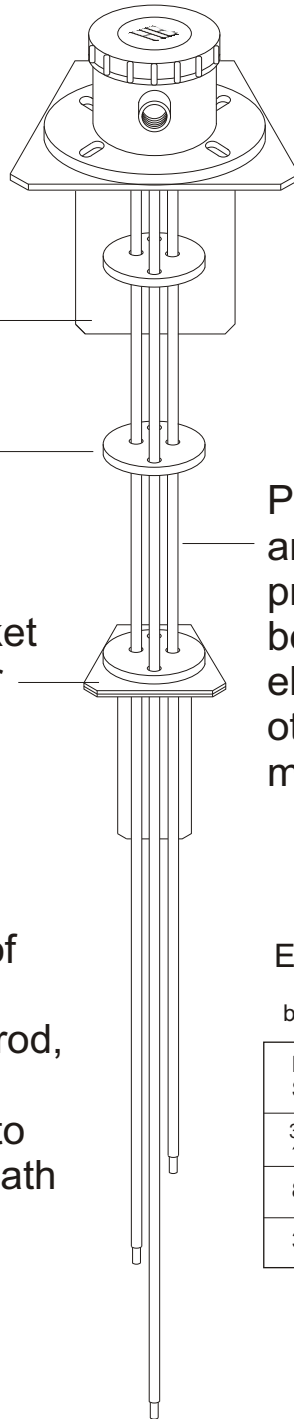

PPA coated electrodes are recommended to prevent tracking between adjacent electrodes which could otherwise cause mal-operation

When there is no risk of clinging debris, earth electrode can be bare rod, or bared just below electrode switch point to give a low resistance path

## Electrode Preparation

Coated electrode should be bared at the tip as follows

Electrode Size	Recommended min bare portion
3/4 BSP	230mm (9")
8mm dia	75mm (3")
3mm dia	75mm (3")