



HAWKER

LEVEL CONTROL SYSTEMS

Type E23 Multi-Electrode Holder

For use with all level controllers and alarms
Operating in aqueous (conducting) liquids
i.e. water, acids, chemical effluent,
beverages etc.

- Space saver
- Accommodates up to 4 electrodes
- 2" B.S.P. P connection
- Corrosion resistant holder
- Electrodes available for aggressive liquids

The **E23 Multi Electrode Holder** is moulded in polypropylene copolymers and accommodates up to four 8mm diameter electrodes, up to 3m long. It is ideal for quiescent water tanks, chemical storage tanks and bunds. Four electrodes enable the E23 to be used for pump control and high or low level alarm. Optional flanges, steady brackets and separators etc are available to aid easy site installation. Always use the well proven CSD circuitry available in the AC,P, and DC1/P ranges of level controllers.

Electrodes:- 316L Stainless Steel with or without PPA coating (WRAS No 0108503), Titanium, Monel, or Hastelloy C.

Temp Range:- -20°C to 85°C

Weight:- 0.3Kg



When ordering Specify:-

*N = No of electrodes 2, 3, or 4

'L' +40mm = electrode lengths.

We can offer a range of optional blank flanges for the E23 in PVC and Stainless Steel in 3 metric sizes drilled and tapped to customer specification.

Flange 1/PVC	100mmØ X 25mm deep
Flange 1/SS	100mmØ X 25mm deep
Flange 2/PVC	150mmØ X 25mm deep
Flange 2/SS	150mmØ X 25mm deep
Flange 3/PVC	200mmØ X 25mm deep
Flange 3/SS	200mmØ X 25mm deep

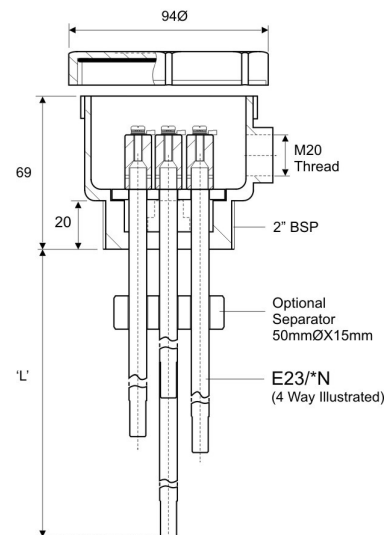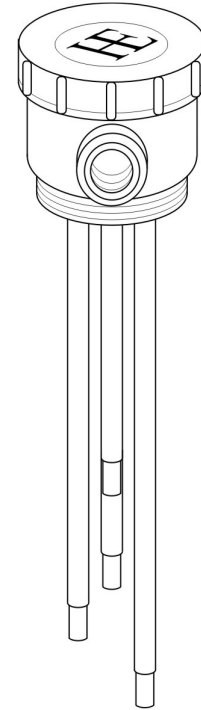

This product has been designed and complies to the relevant standards as listed in its certificate of conformity the installer/user must ensure compliance.
The crossed-out bin symbol, placed on the product, reminds you of the need to dispose of the product correctly at the end of its life.
Because of continuing development we reserve the right to change the specifications without notice

HAWKER ELECTRONICS LTD.

57 The Avenue,

Rubery Industrial Estate,

Birmingham B45 9AL, ENGLAND

Telephone: +44 (0)121-453-8911 Fax: +44(0)121-453-3777

email: info@hawker-electronics.co.uk www.hawker-electronics.co.uk



FM 10000



BRITISH MADE