



HAWKER LEVEL CONTROL SYSTEMS

Light Duty Electrode Holder HPE7/P

Manufactured in Polypropylene
optional back nut available.
Softening temperature 120°C

Suitable for 8mm diameter rod
electrodes, typically Stainless Steel
type 316, Monel, Titanium.



Stainless Steel electrodes can be
supplied plain or plastic coated.
Plastic coated electrodes are PPA
coated WRAS No 0107503.

Maximum shipping length 3m.
Couplers available for length
in excess.

Steady brackets are advisable
every 2m or less if turbulence
is present.

HPE7/P- Pressure tight to 300
P.S.I. at 20°C complete with grub
screw coupler or threaded coupler
(Type HPE7/P), (Type HPE7/P/X).

INTRINSICALLY SAFE models
available for use with P7/IS
level controller.

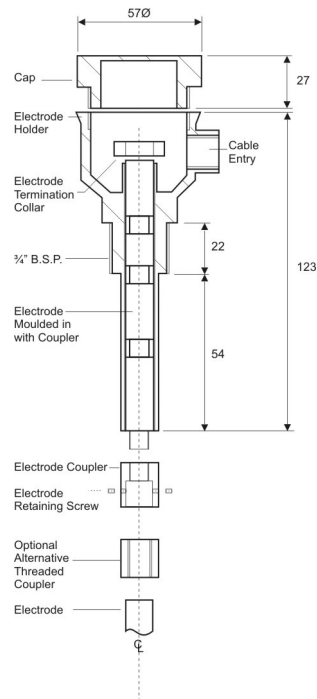

This product has been designed and complies to the relevant standards as listed in its certificate of conformity the installer/user must ensure compliance.
The crossed-out bin symbol, placed on the product, reminds you of the need to dispose of the product correctly at the end of its life.
Because of continuing development we reserve the right to change the specifications without notice

HAWKER ELECTRONICS LTD.

57 The Avenue,
Rubery Industrial Estate,
Birmingham B45 9AL, ENGLAND
Telephone: +44 (0)121-453-8911 Fax: +44(0)121-453-3777
email: info@hawker-electronics.co.uk www.hawker-electronics.co.uk



FM 10000



BRITISH MADE