



**HAWKER**

**LEVEL CONTROL SYSTEMS**

## ***Light Duty Electrode Holder HPE7***

Manufactured in Polypropylene complete with back nut. Softening temperature 120°C

Suitable for 8mm diameter rod electrodes, typically Stainless Steel Type 316, supplied plain or plastic coated (for plastic coated electrodes order holder HPE7/1).



Plastic coated electrodes are PPA coated WRAS No 1610508. Also available in Hastelloy C, Monel, Titanium.

Maximum electrode shipping length 3m. Stainless Steel couplers are available for extending the electrode length.

Steady brackets are advisable every 2m if turbulence is present.

**HPE7-** Electrode length is measured from shoulder **Point A**. Add 32mm to electrode length for insertion in to head

**ATEX APPROVED** models are available for use with P8/IS level controller.

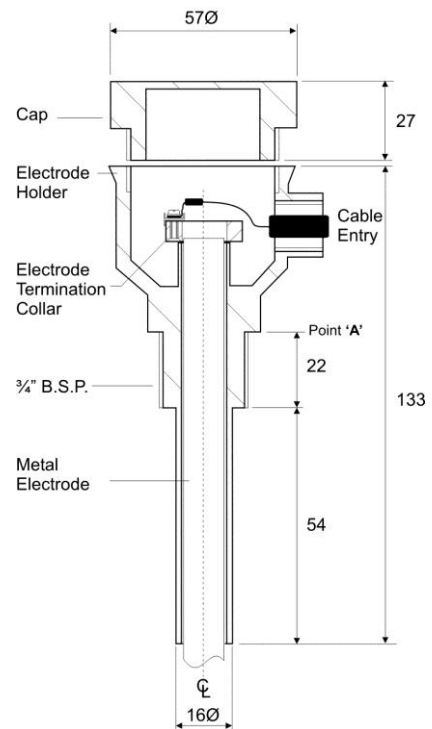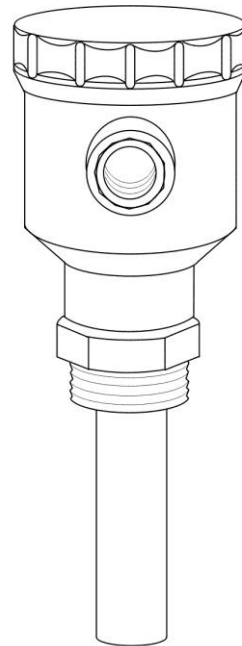

This product has been designed and complies to the relevant standards as listed in its certificate of conformity. The installer/user must ensure compliance. The crossed out bin symbol, placed on the product, reminds you of the need to dispose of the product correctly at the end of its life. Because of continuing development we reserve the right to change the specifications without notice

### **HAWKER ELECTRONICS LTD.**

57 The Avenue,  
 Rubery Industrial Estate,  
 Birmingham B45 9AL, ENGLAND  
 Telephone: +44 (0)121-453-8911 Fax: +44(0)121-453-3777  
 email: info@hawker-electronics.co.uk www.hawker-electronics.co.uk



FM 10000



BRITISH MADE