



HAWKER

LEVEL CONTROL SYSTEMS

Light Duty Electrode Holder HPE7/Pa

Manufactured in Polypropylene
optional back nut available.
Softening temperature 120°C



Supplied with 1 metre of
316L Stainless Steel electrode
moulded in giving a useable length
of 960mm. Electrodes can be
extended using suitable couplers.

Maximum electrode shipping
length 3m. Stainless Steel
couplers are available for
extending the electrode length.

Steady brackets are advisable
every 2m if turbulence is present

HPE7/Pa- Pressure tight to 300
P.S.I. with 8mm rod moulded in.
Maximum length 960mm from
Point A.

ATEX Approved models are
available for use with P8/IS
level controller.

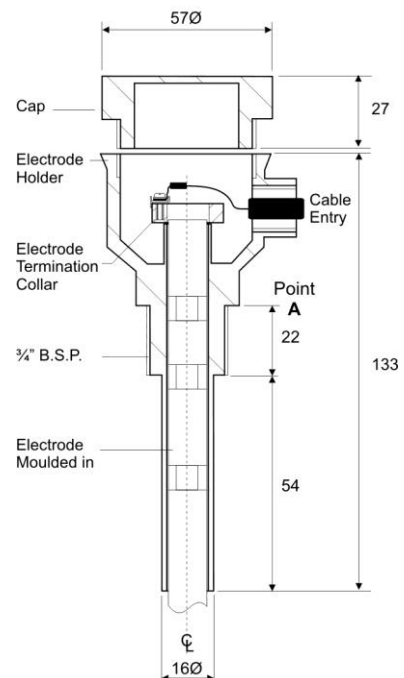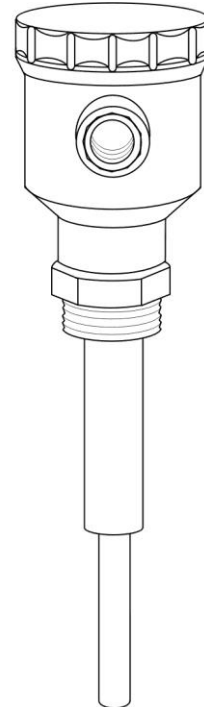

This product has been designed and complies to the relevant standards as listed in its certificate of conformity. The installer/user must ensure compliance.
The crossed out bin symbol, placed on the product, reminds you of the need to dispose of the product correctly at the end of its life.
Because of continuing development we reserve the right to change the specifications without notice

HAWKER ELECTRONICS LTD.

57 The Avenue,
Rubery Industrial Estate,
Birmingham B45 9AL, ENGLAND
Telephone: +44 (0)121-453-8911 Fax: +44(0)121-453-3777
email: info@hawker-electronics.co.uk www.hawker-electronics.co.uk



FM 10000

BRITISH MADE